




TRANSHOW INDUSTRY LIMITED

GAOYANG RD, ZHOUEAN VILLAGE, JIANGSHAN TOWN
YINZHOU DISTRICT, NINGBO CITY, 315100 CHINA

Tel: +86-574-8736.7873 Fax: +86-574-8736.4349

[Http://www.hexnuts.cn](http://www.hexnuts.cn) Email: transhow@transhow.net

NYLON INSERT LOCK NUT NE TYPE

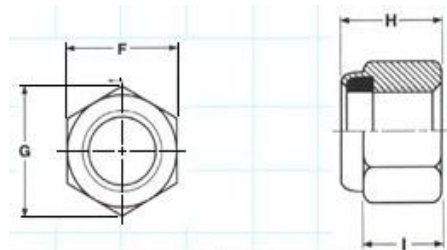

| Nominal Size or Basic Thread Diameter [⊖] | F [⊖] | | | H [⊖] | | I [⊖] | G [⊖] |
|--|---------------------------------|--------------------|--------------------|------------------------|--------------------|--------------------------|-------------------------------------|
| | Width Across Flats [⊖] | | | Thickness [⊖] | | Side Height [⊖] | Width Across Comers [⊖] |
| | Basic [⊖] | Max. [⊖] | Min. [⊖] | Max. [⊖] | Min. [⊖] | Ref. [⊖] | Ref. [⊖] |
| 4 0.1120 [⊖] | 1/4 [⊖] | 0.251 [⊖] | 0.241 [⊖] | 0.153 [⊖] | 0.133 [⊖] | 0.081 [⊖] | 0.268 [⊖] |
| 6 0.1380 [⊖] | 5/16 [⊖] | 0.313 [⊖] | 0.302 [⊖] | 0.188 [⊖] | 0.168 [⊖] | 0.103 [⊖] | 0.399 [⊖] |
| 8 0.1640 [⊖] | 11/32 [⊖] | 0.345 [⊖] | 0.332 [⊖] | 0.239 [⊖] | 0.219 [⊖] | 0.140 [⊖] | 0.374 [⊖] |
| 10 0.1900 [⊖] | 3/8 [⊖] | 0.376 [⊖] | 0.362 [⊖] | 0.249 [⊖] | 0.229 [⊖] | 0.140 [⊖] | 0.410 [⊖] |
| 1/4 0.2500 [⊖] | 7/16 [⊖] | 0.439 [⊖] | 0.428 [⊖] | 0.328 [⊖] | 0.298 [⊖] | 0.225 [⊖] | 0.482 [⊖] |
| 5/16 0.3125 [⊖] | 1/2 [⊖] | 0.502 [⊖] | 0.489 [⊖] | 0.359 [⊖] | 0.329 [⊖] | 0.250 [⊖] | 0.552 [⊖] |
| 3/8 0.3750 [⊖] | 9/16 [⊖] | 0.565 [⊖] | 0.551 [⊖] | 0.468 [⊖] | 0.438 [⊖] | 0.335 [⊖] | 0.622 [⊖] |
| 7/16 0.4375 [⊖] | 11/16 [⊖] | 0.690 [⊖] | 0.675 [⊖] | 0.468 [⊖] | 0.438 [⊖] | 0.324 [⊖] | 0.698 [⊖] |
| 1/2 0.5000 [⊖] | 3/4 [⊖] | 0.752 [⊖] | 0.736 [⊖] | 0.609 [⊖] | 0.579 [⊖] | 0.464 [⊖] | 0.837 [⊖] |
| 9/16 0.5625 [⊖] | 7/8 [⊖] | 0.877 [⊖] | 0.861 [⊖] | 0.656 [⊖] | 0.626 [⊖] | 0.469 [⊖] | 0.978 [⊖] |
| 5/8 0.6250 [⊖] | 15/16 [⊖] | 0.940 [⊖] | 0.922 [⊖] | 0.765 [⊖] | 0.735 [⊖] | 0.593 [⊖] | 1.051 [⊖] |
| 3/4 0.7500 [⊖] | 1-1/8 [⊖] | 1.127 [⊖] | 1.088 [⊖] | 0.890 [⊖] | 0.860 [⊖] | 0.742 [⊖] | 1.191 [⊖] |
| 7/8 0.8750 [⊖] | 1-5/16 [⊖] | 1.315 [⊖] | 1.269 [⊖] | 0.999 [⊖] | 0.969 [⊖] | 0.790 [⊖] | 1.430 [⊖] |
| 1 1.0000 [⊖] | 1-1/2 [⊖] | 1.502 [⊖] | 1.450 [⊖] | 1.078 [⊖] | 1.061 [⊖] | 0.825 [⊖] | 1.615 [⊖] |
| 1-1/8 1.1250 [⊖] | 1-11/16 [⊖] | 1.690 [⊖] | 1.631 [⊖] | 1.203 [⊖] | 1.141 [⊖] | 0.930 [⊖] | 1.826 [⊖] |
| 1-1/4 1.2500 [⊖] | 1-7/8 [⊖] | 1.877 [⊖] | 1.812 [⊖] | 1.422 [⊖] | 1.360 [⊖] | 1.125 [⊖] | 2.038 [⊖] |
| 1-1/2 1.5000 [⊖] | 2-1/4 [⊖] | 2.252 [⊖] | 2.175 [⊖] | 1.640 [⊖] | 1.578 [⊖] | 1.313 [⊖] | 2.444 [⊖] |